


SECTION A-A
TEMPORARY SILT FENCE

PERSPECTIVE
SILT FENCE PANELS AT JOINTS

SECTION
TRENCH DETAIL

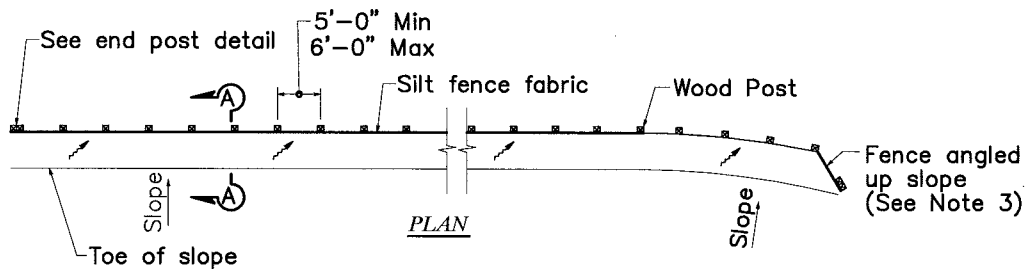

NOTES:

1. Install Temporary Silt Fence by first digging trench, driving posts, placing and securing fabric. Then backfill and tamp.
2. Reach length not to exceed 500 feet.
3. The down stream end of the Temporary Silt Fence shall have the last 8' angled up slope.
4. Setback dimensions may vary to fit field conditions.
5. Posts to overlap and fence fabric to fold around each post one full turn. Secure fabric with 4 staples for each post.
6. Posts shall be driven tightly together to prevent potential flow-through of sediment at the joint. The tops of the posts shall be secured to each other with wire.
7. For each end post, fence fabric shall be folded around two posts one full turn and secured with 4 staples.
8. Minimum of 4 staples shall be installed per post. Dimensions shown are typical.
9. Maintenance openings shall be constructed in a manner to ensure that sediment is retained by the temporary silt fence.
10. Joint sections shall not be placed at sump locations.

LEGEND

- Tamped backfill
- Slope direction
- Direction of flow



**CITRUS
HEIGHTS
WATER
DISTRICT**

TEMPORARY SILT FENCE

CITRUS HEIGHTS WATER DISTRICT

APPROVED BY:

Robert A. Churchill

DATE: 5/8/13

CITRUS HEIGHTS WATER DISTRICT

DRAWN: 8 MAY 2013

REVISED: NONE

SCALE: N.T.S.

DESIGN: P.A.D.

CAD FILE: SWPPP_115.DWG

PAGE:

SWPPP_115